

ASSEMBLY INSTRUCTIONS

Note: This is a representative drawing and is not intended to match the style of your luminary.

1. Place all parts on a flat smooth surface.
2. Remove socket ring from lamp holder.
3. Insert shade thru the socket and secure shade with socket ring.
4. Install Bulb (included)

Caution: This lamp includes LED bulbs. Do not utilize incandescent or CFL bulbs with this item. Only the provided bulbs may be used on this item.

WARNING - Do not attempt to replace the bulb(s) while the lamp is plugged into a wall receptacle.

If you choose to operate the lamp with batteries: (see Figure 2.0)

1. Remove the 3 screws on the metal bracket and pull out bracket
2. Insert 3 X "C" batteries (Not Included), ensuring the correct polarization.
3. Place bracket to desired position, lining up the holes on the bracket to the canopy. Secure with screws.

Remote operation and set up:

1. Install the battery in the back of the Remote Control, 1 x Type "23A", not included.
2. Programming the remote:
 - a. Either plug the adapter to the battery box, or install the batteries (3 x C Type batteries, not included) in the battery box. Each battery will fit in the three separate compartments, follow polarization diagram indicated in the compartments.
 - b. Press and hold the SET BUTTON on the battery box, and at the same time press the ON "⏻" button on the REMOTE CONTROL for 3 seconds. (Note: Battery box must be programmed for each of the battery boxes 2.)
 - c. Lights will turn on indicating the REMOTE CONTROL and BATTERY BOX have been paired.
3. Timer operation: Press ON, then the desired timer function (4 Hrs.), the bulbs will blink once confirming the function set up. The lamp will start a 24 Hrs. cycle:
 - a. 4 Hrs. ON / 20 Hrs. OFF, or
4. Dimmer operation, the Remote Control button " " selects between three light brightness options. Press to select the desired brightness.

Please note: If you choose to operate the lamp with adapter, the cord may be on the top of the canopy or on the bottom; it is dependent on the direction of the lamp. (See Figure 4 for illustration)

BATTERY REPLACEMENT:

1. Remove exhausted batteries from the base.
2. Insert 3 X "C" batteries, ensuring the correct polarization.

Note: Always use three (3) new batteries. Do not mix old and new batteries, Alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium) batteries.

CARE INSTRUCTIONS:

1. Do not expose the item to water or dampness.
2. Turn the item off when not in use for extended periods of time.
3. If the item is dusty or dirty, wipe down with a DRY cloth.

4. Remove the batteries when storing the item.

DISPOSE OF BATTERIES IN ACCORDANCE WITH LOCAL AND FEDERAL LAWS. DO NOT EXPOSE BATTERIES TO FIRE OR WATER. DO NOT ATTEMPT TO USE DIFFERENT SIZED/TYPES OF BATTERIES OR INSTALL BATTERIES BACKWARDS. NEVER TOUCH DAMAGED OR LEAKING BATTERIES, THIS COULD RESULT IN BURN INJURIES OR CAUSE SERIOUS INTERNAL INJURES IF SWALLOWED.

Figure 2.0



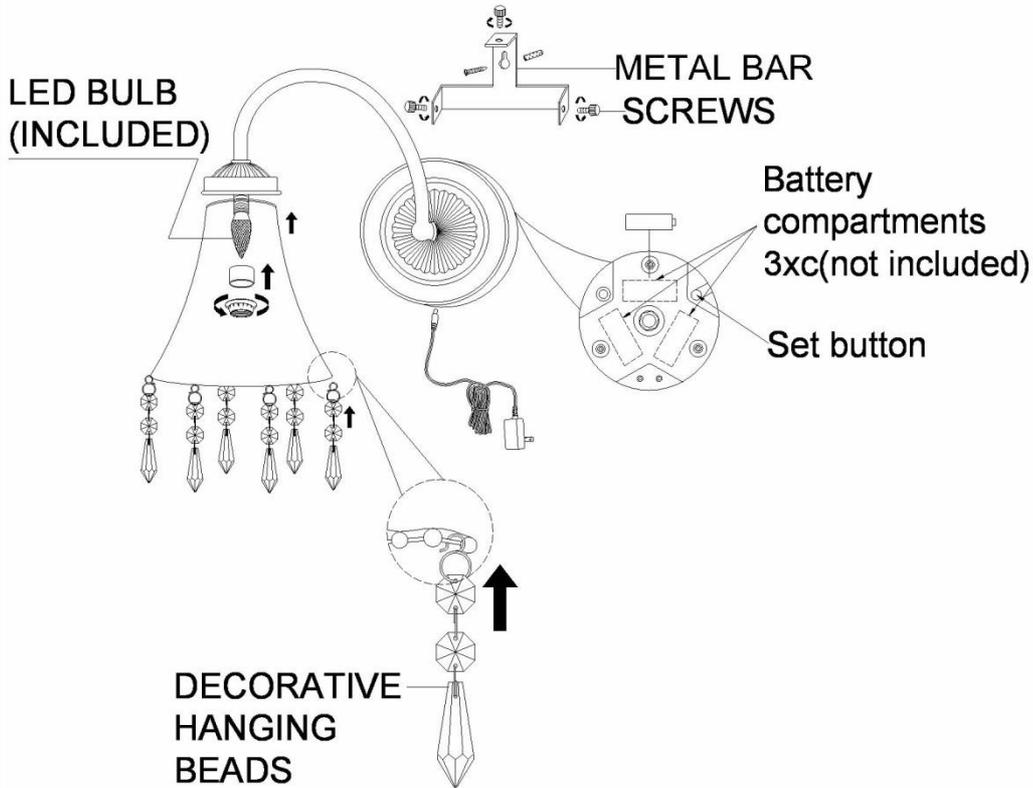


Figure 2

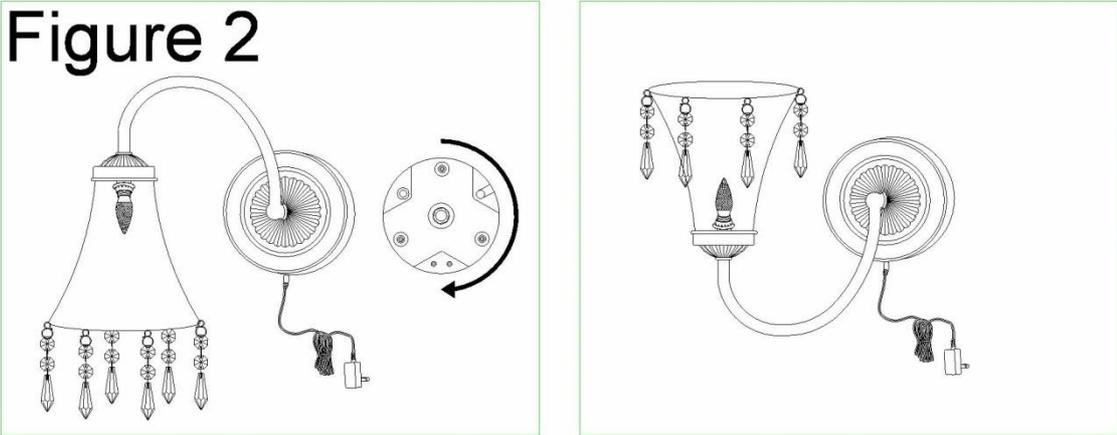

Parts

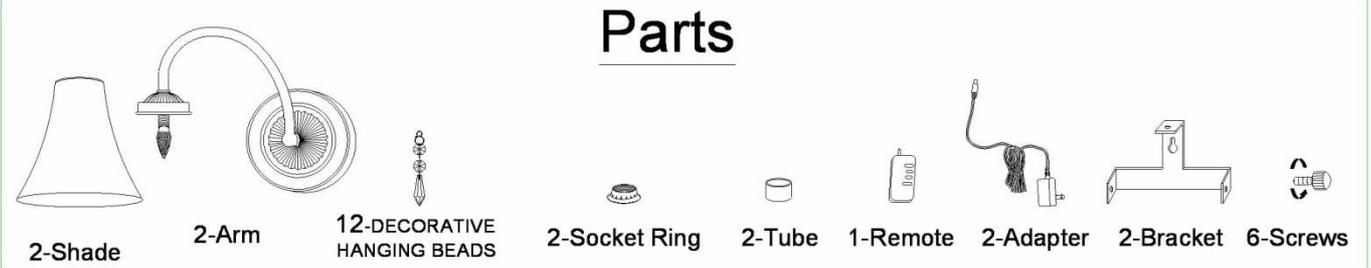

MADE IN CHINA